


Tabela standardowych wymiarów uszczelki kołnierzy,
według normy:



DIN 2690

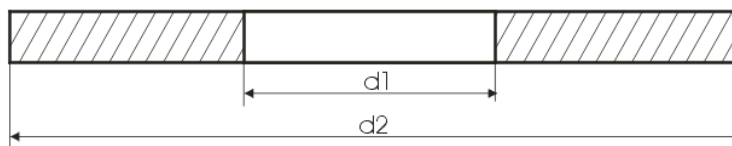

DN	d1 [mm]	0,25 [MPa]	0,6 [MPa]	1,0 [MPa]	1,6 [MPa]	2,5 [MPa]	4,0 [MPa]
		d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]	d2 [mm]
10	18	-	38	45	45	-	45
15	22	-	43	50	50	-	50
20	28	-	53	60	60	-	60
25	35	-	63	70	70	-	70
32	43	-	75	82	82	-	82
40	49	-	85	92	92	-	92
50	61	-	95	107	107	-	107
65	77	-	115	127	127	-	127
80	90	-	132	142	142	-	142
100	115	-	152	162	162	-	168
125	141	-	182	192	192	-	195
150	169	-	207	218	218	-	225
(175)	195	-	237	248	248	255	267
200	220	-	262	273	273	285	292
250	274	-	318	328	330	342	353
300	325	-	373	378	385	402	418
350	368	-	423	438	445	458	475
400	420	-	473	490	497	515	547
(450)	470	-	528	540	557	565	572
500	520	-	578	595	618	625	628
600	620	-	680	695	735	730	745
700	720	-	785	810	805	830	850
800	820	-	890	915	910	940	970
900	920	-	990	1015	1010	1040	1080
1000	1020	-	1090	1120	1125	1150	1190
1200	1220	1290	1305	1340	1340	1360	1395

MODERTECH Sp. z o. o.
ul. Biegusa 39
44-100 Gliwice

REGON 240194455
NIP 631-24-70-575